

Technical Specifications Resinify TempCrown Performance (TDS)

Material Properties:

- **Tensile Strength:** 66.5 MPa (ASTM D638)
- **Flexural Strength:** ≥ 100 MPa (ASTM D790-02)
- **Flexural Modulus:** 2980 MPa (ASTM D790-02)
- **Shore Hardness:** 85.7 (ASTM D2240)
- **Density:** 1.14 - 1.5 g/cm³ at 23°C (ASTM D1475, BEGO Standard)
- **Viscosity:** 2500-6000 mPa.s at 23°C (DIN 53211-4, BEGO Standard)
- **Color Options:** VITA Classic A1, A2, B1, BL

Performance Characteristics:

- **Flexural Strength (post cured):** ≥ 100 MPa (EN ISO 10477, EN ISO 4049)
- **Volumetric Wear:** 0.012 mm³ at 400k cycles
- **Total Fracture Work:** 1301 \pm 287.5 J/m²



A Hybrid Nanoceramic Resin Designed for Dependable Performance:


Commitment to Compliance:

- **Biocompatibility:** Passed ISO 10993 cytotoxicity test.
- **ISO Standards:** Complies with EN ISO 13485:2016, EN ISO 14971:2019.
- **Usage Duration:** Suitable for temporary restorations that may remain in the mouth for up to 12 months.



Product Overview:

- **Product Name:** **Resinify TempCrown**
- **Type:** Temporary Crown and Bridge Resin
- **Application:** Designed for same-day chairside digital crowns and bridges, inlays, onlays, overlays, and veneers.

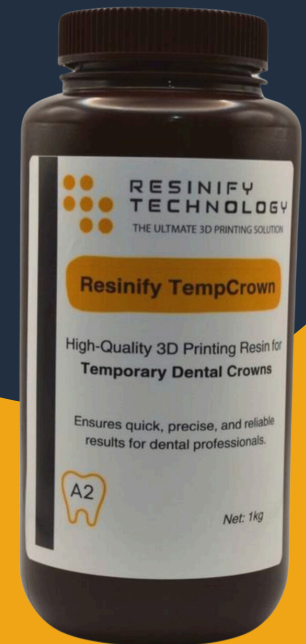

www.ResinifyTechnology.com
Support@ResinifyTechnology.com
[@ResinifyTechnology](https://www.instagram.com/ResinifyTechnology)



Scan to learn more about Resinify TempCrown